

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CBR6F-010 SERIES

SILICON BRIDGE RECTIFIER
FAST RECOVERY
6.0 AMPS, 100 THRU 1000 VOLTS

EPOXY CASE

DESCRIPTION


The CENTRAL SEMICONDUCTOR CBR6F-010 Series types are Silicon Single Phase Full Wave Bridge Rectifier designed for applications requiring fast reverse recovery times.

MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

| | SYMBOL | CBR6F -010 | CBR6F -020 | CBR6F -040 | CBR6F -060 | CBR6F -080 | CBR6F -100 | UNIT |
|--|-----------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|------|
| Peak Repetitive Reverse Voltage | V _{RRM} | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| DC Blocking Voltage | V _R | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| RMS Reverse Voltage | V _{R(RMS)} | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Average Forward Current (T _C =50°C) | I _O | | | 6.0 | | | | A |
| Peak Forward Surge Current | I _{FSM} | | | 125 | | | | A |
| Operating and Storage Junction Temperature | T _J , T _{stg} | | | -65 TO +150 | | | | °C |

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

| SYMBOL | TEST CONDITIONS | MIN | MAX | UNIT |
|-----------------|--|-----|-----|------|
| V _F | I _F =3.0 | | 1.3 | V |
| I _R | V _R =Rated V _{RRM} | | 10 | μA |
| t _{rr} | (100V thru 400V) | | 200 | ns |
| t _{rr} | (600V thru 1000V) | | 350 | ns |

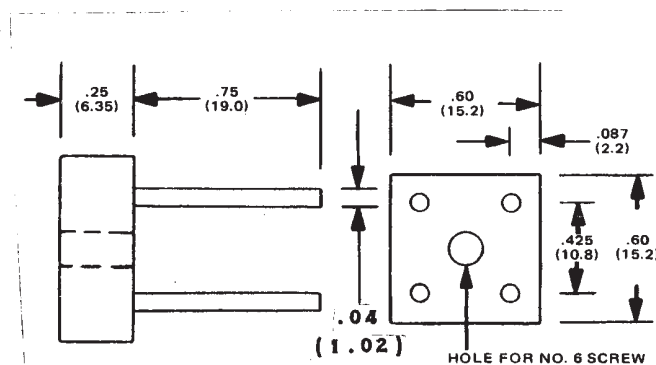

DIMENSIONS IN INCHES (MIL)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms

Product End of Life Notification

| | |
|---------------------------|----------|
| PDN ID: | PDN01002 |
| Notification Date: | 9/01/15 |
| Last Buy Date: | 3/01/16 |
| Last Shipment Date | 9/01/16 |

Summary:Case CM Bridge Rectifiers

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

| <u>Central Part Number</u> | <u>Replacement</u> |
|----------------------------|--------------------|
| CBR10-J010 | CBR10-J100 |
| CBR10-J020 | CBR10-J100 |
| CBR10-J040 | CBR10-J100 |
| CBR10-J060 | CBR10-J100 |
| CBR10-J080 | CBR10-J100 |
| CBR10A-J010 | CBR10-J100 |
| CBR10A-J020 | CBR10-J100 |
| CBR10A-J040 | CBR10-J100 |
| CBR10A-J060 | CBR10-J100 |
| CBR10A-J080 | CBR10-J100 |
| CBR10F-J010 | CBR10-J100 |
| CBR10F-J020 | CBR10-J100 |
| CBR10F-J040 | CBR10-J100 |
| CBR10F-J060 | CBR10-J100 |
| CBR10F-J080 | CBR10-J100 |
| CBR10F-J100 | CBR10-J100 |
| CBR6-010 | CBR10-J100 |
| CBR6-020 | CBR10-J100 |
| CBR6-040 | CBR10-J100 |
| CBR6-060 | CBR10-J100 |
| CBR6-080 | CBR10-J100 |
| CBR6-100 | CBR10-J100 |
| CBR6A-020 | CBR10-J100 |
| CBR6A-040 | CBR10-J100 |
| CBR6A-060 | CBR10-J100 |
| CBR6A-080 | CBR10-J100 |
| CBR6F-010 | CBR10-J100 |
| CBR6F-020 | CBR10-J100 |
| CBR6F-040 | CBR10-J100 |
| CBR6F-060 | CBR10-J100 |
| CBR6F-080 | CBR10-J100 |
| CBR6F-100 | CBR10-J100 |
| CEN931 | N/A |

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we
 *** CONTINUED ***

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



<http://www.centrasemi.com>

Product End of Life Notification

| | |
|---------------------------|----------|
| PDN ID: | PDN01002 |
| Notification Date: | 9/01/15 |
| Last Buy Date: | 3/01/16 |
| Last Shipment Date | 9/01/16 |

*** CONTINUED FROM PRIOR PAGE ***

Central Part Number **Replacement**

*** CONTINUED FROM PRIOR PAGE ***

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.