

X3C19P2-30S Inventory

X3C19P2-30S Order Online

X3C19P2-30S

| | ~ | 0 | ~ | | |
|---|----|---|---|---|--|
| 2 | IN | | R | 9 | |
| | | F | | | |

'en What'll we think of next?"

Image may be representation. See specs for product details.

| Manufacturer Part Number: | X3C19P2-30S | |
|---------------------------|------------------------------------------------------|--|
| Manufacturer/Brand: | Anaren | |
| Part of Description: | COUPLER 90DEG 1.4GHZ-2.7GHZ 30DB | |
| | 1.X3C19P2-30S.pdf | |
| Datasheets: | 2.X3C19P2-30S.pdf | |
| | DF 3.X3C19P2-30S.pdf | |
| RoHs Status: | Kohs Lead free / RoHS | |
| Stock Condition: | Compliant New original, 1607 pcs Stock Available. | |
| Ship From: | Hong Kong | |
| Shipment Way: | DHL/Fedex/TNT/UPS/EMS | |

Specifications

| Part Number | X3C19P2-30S |
|-------------------------|-----------------------------------------|
| Manufacturer | Anaren |
| Description | COUPLER 90DEG 1.4GHZ-2.7GHZ 30DB |
| Category | RF/IF and RFID > RF Directional Coupler |
| Part Status | 1607 pcs Stock |
| Supplier Device Package | SMD |
| Series | Xinger III® |
| Return Loss | 24.9dB |
| Power - Max | 200W |
| Packaging | Tape & Reel (TR) |
| Package / Case | 2520 (6450 Metric) |
| Isolation | - |
| Insertion Loss | 0.1dB |
| Frequency | 1.4GHz ~ 2.7GHz |
| Coupling Factor | 30.4dB |
| Coupler Type | Standard |
| Applications | DCS, LTE, PCS, WCDMA |


X3C19P2-30S Price

X3C19P2-30S New

X3C19P2-30S Manufacturer

X3C19P2-30S Original

You May Be Also Be interested

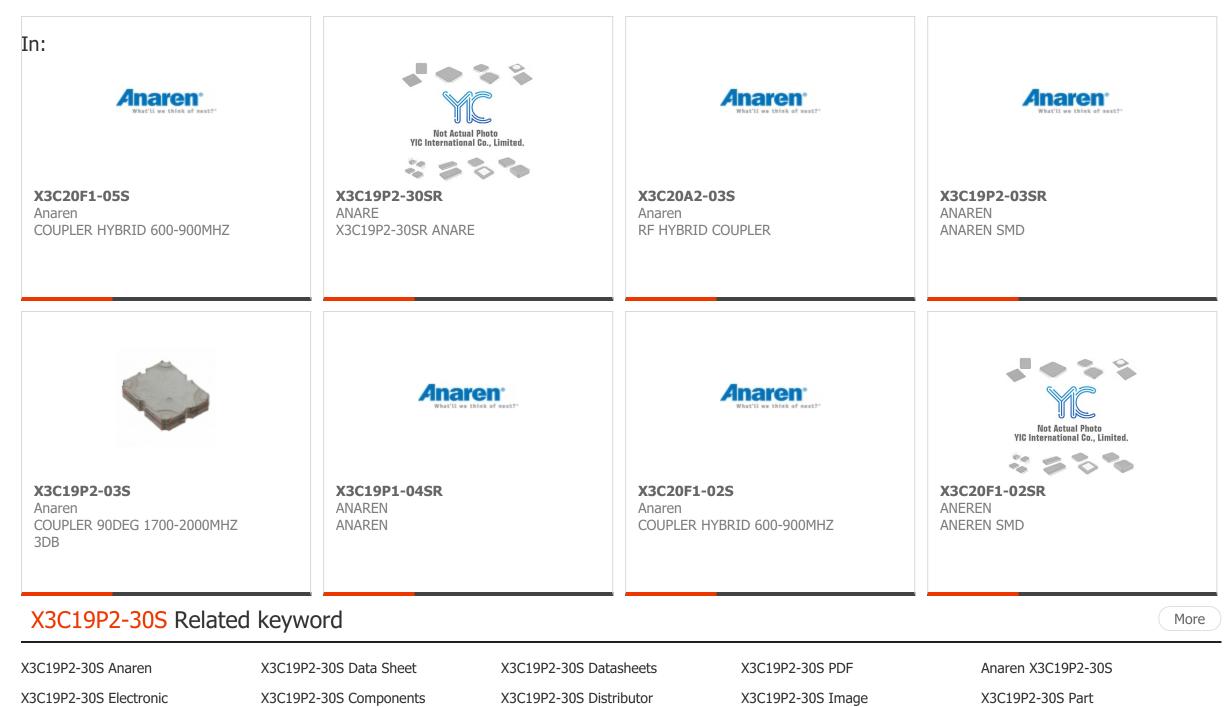

Contact us: Info@YIC-Electronics.com

X3C19P2-30S Picture

X3C19P2-30S Warranted

ADD:Unit A5-B5 No.509, 5/F Sing Win Factory Building, 15-17 Shing yip St, Kwun Tong, Kowloon, HongKong. Copyright © 2023 YIC-Electronics.com - YIC International Co., Limited

X3C19P2-30S Stock

X3C19P2-30S RFQ