

Electronic Components

KEM

C1210X563G5JACAUTO


Manufacturer Part Number:	C1210X563G5JACAUTO
Manufacturer/Brand:	KEMET
Part of Description:	CAP CER 0.056UF 50V U2J 1210
Datasheets:	C1210X563G5JACAUTO.pdf
RoHs Status:	Kohs Lead free / RoHS
Stock Condition:	Compliant New original, 2510 pcs Stock Available.
Ship From:	Hong Kong
Shipment Way:	DHL/Fedex/TNT/UPS/EMS

Specifications

Image may be representation. See specs for product details.

ManufacturerKEMETDescriptionCAP CER 0.056UF 50V U21 1210CategoryCapacitors > Ceranic CapacitorsPart Status2510 pcs StockVoltage - Rated50VTolerance±2%Thickness (Max)0.035" (0.88mm)Temperature CoefficientU2JSize / Dimension0.130" L x 0.102" W (3.30mm x 2.50mm)SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)Lead Style-	
CategoryCapacitors > Ceramic CapacitorsPart Status2510 pcs StockVoltage - Rated50VTolerance±2%Thickness (Max)0.035" (0.88mm)Temperature CoefficientU2JSize / Dimension0.130" L x 0.102" W (3.30mm x 2.50mm)SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Part Status2510 pcs StockVoltage - Rated50VTolerance±2%Thickness (Max)0.035" (0.88mm)Temperature CoefficientU2JSize / Dimension0.130" L x 0.102" W (3.30mm x 2.50mm)SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Voltage - Rated50VTolerance±2%Thickness (Max)0.035" (0.88mm)Temperature CoefficientU2JSize / Dimension0.130" L x 0.102" W (3.30mm x 2.50mm)SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Tolerance±2%Thickness (Max)0.035" (0.88mm)Temperature CoefficientU2JSize / Dimension0.130" L x 0.102" W (3.30mm x 2.50mm)SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Thickness (Max)0.035" (0.88mm)Temperature CoefficientU2JSize / Dimension0.130" L x 0.102" W (3.30mm x 2.50mm)SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Temperature CoefficientU2JSize / Dimension0.130" L x 0.102" W (3.30mm x 2.50mm)SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Size / Dimension0.130" L x 0.102" W (3.30mm x 2.50mm)SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
SeriesFT-CAPRatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
RatingsAEC-Q200PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
PackagingTape & Reel (TR)Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Package / Case1210 (3225 Metric)Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Operating Temperature-55°C ~ 125°CMounting TypeSurface Mount, MLCCMoisture Sensitivity Level (MSL)1 (Unlimited)	
Mounting Type Surface Mount, MLCC Moisture Sensitivity Level (MSL) 1 (Unlimited)	
Moisture Sensitivity Level (MSL) 1 (Unlimited)	
Lead Style -	
Lead Spacing -	
Lead Free Status / RoHS Status Lead free / RoHS Compliant	
Height - Seated (Max) -	
Features Soft Termination	
Failure Rate -	
0.056µF ±2% 50V Ceramic Capacitor U2J 1210 (3225	
Capacitance 0.056µF	
Applications Automotive, Boardflex Sensitive	

You May Be Also Be interested

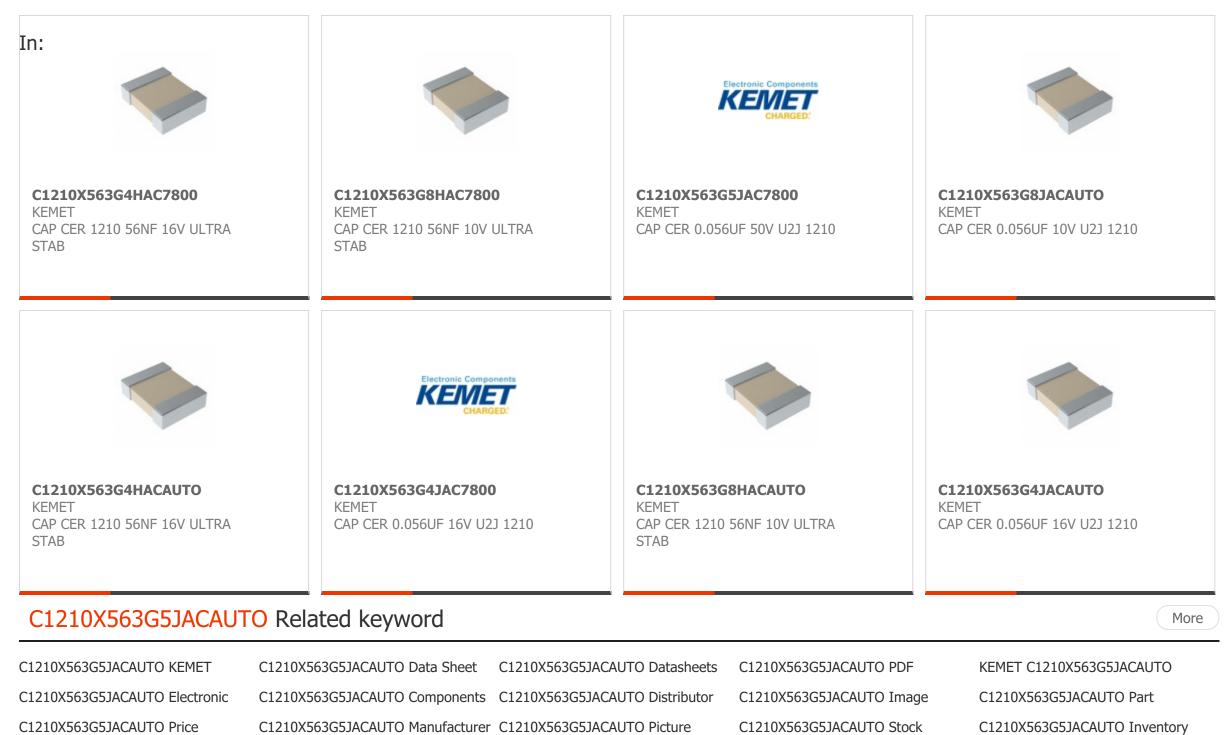

C1210X563G5JACAUTO Order Online

Contact us: Info@YIC-Electronics.com

ADD:Unit A5-B5 No.509, 5/F Sing Win Factory Building, 15-17 Shing yip St, Kwun Tong, Kowloon, HongKong.

Copyright © 2023 YIC-Electronics.com - YIC International Co., Limited